

Osprey[®] 825e

Video Capture Card

*High-quality
streaming in a
compact size.*



The Osprey 825e provides high-quality streaming performance in a compact option. Now, customers can capture two SDI inputs in a low-profile form factor. This dual input card can ingest 3G, HD and SD SDI and automatically adapts between standard- and high-definition signals.

Optimized for live streaming.

Take advantage of advanced video pre-processing features such as logo/bitmap overlay with transparency and positioning controls, de-interlacing, color space conversion and closed-caption extraction and rendering.

Multiple streams.

The Osprey 825e also comes standard with SimulStream[®]. This driver enhancement provides the ability to feed multiple encoding applications at the same time.

Ideal Solutions

- > Broadcasters
- > Enterprise
- > Education
- > Government
- > Global OEM system integrators

Applications


- > Webcasting
- > Live streaming
- > Podcasting
- > Mobile TV
- > Video on Demand

Key Attributes

- > Accepts 3G, HD and SD SDI inputs
- > Automatically adapts between SD and HD signals on the fly, HD to SD downscaling
- > PCIe host interface
- > SimulStream option enables:
 - *Completely independent settings for sizing, scaling and bit rate speeds, plus logo overlays with dynamic positioning*
 - *A multitude of simultaneous video format outputs*
- > Professional features, such as loss of video detection, color space conversion, automatic telecine detection and processing, and automatic optimization for changing motion content
- > Drivers available for Microsoft[®] Windows[®]; Linux operating systems driver available early 2013

OSPREY® 825e

Video Capture Card

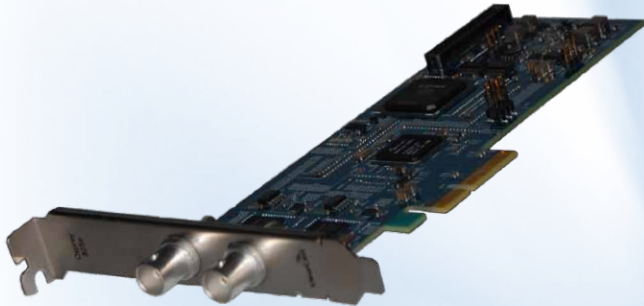

Osprey 825e card



Osprey 825e low-profile bracket

Supported Modes

1920 x 1080/60/i	1280 x 720/30
1920 x 1080/59.94/i	1280 x 720/29.97
1920 x 1080/50/i	1280 x 720/25
1920 x 1080/30/p	1280 x 720/24
1920 x 1080/29.97/p	1280 x 720/23.98
1920 x 1080/25/p	720 x 480/30/i
1920 x 1080/24/p	720 x 480/29.97/i
1920 x 1080/23.98/p	720 x 576/25/i
1280 x 720/60	720 x 576/50/p
1280 x 720/59.94	720 x 576/25/p
1280 x 720/50	

Supported modes for 3G SDI

1920 x 1080/60/p	1920 x 1080/59.94/p
1920 x 1080/50/p	

Specifications

Driver Support:

- Microsoft® DirectShow® API
- Linux (*expected availability Q2 2013*)

Inputs:

Video:

- 2x SDI (BNC x 2)
 - 3G SMPTE 424 M
 - HD SMPTE 292 M
 - SD SMPTE 259 M

Audio:

- Embedded SDI (8 channels per SDI input)

Connectivity:

- PCI Express (x 4):
 - Slots: x 4, x 8, or x 16
 - PCIe 1.1

Pre-Processing:

- Closed-caption extraction / rendering (CEA-608/CEA-708)
- Logo / bitmap overlay
- Scaling, cropping, de-interlacing and inverse telecine
- Loss of video automatic test pattern generation with text overlay option

Dimensions:

- Low-profile form factor
- 6.60" L x 2.71" H (16.76 cm L x 6.88 cm H)
(includes low profile bracket)

Hardware Warranty:

- 2 year limited hardware warranty

System Requirements:

- High-definition video requires intense bandwidth across the system bus, CPU, and memory. CPU Direct or North Bridge PCIe slots are required.
- Multi-core processors (4 or more) are recommended to run video applications.

ViewCast® Delivering Video Whenever, Wherever



© 2013 ViewCast Corporation. ViewCast®, Niagara®, Osprey®, SimulStream®, SchedulStream®, GoStream®, EZStream®, and Niagara SCX® (and design)™ are registered trademarks of ViewCast Corporation or its subsidiaries. Flash is a trademark of Adobe Systems Inc. iPad, iPod and iPhone are registered trademarks of Apple Inc. All other trademarks are the property of their respective owners. Product specifications and availability may change without notice.